



COLLATED 28° WIRE WELD NAILS

GENERAL CONSTRUCTION

- Bright Coated
- Electrogalvanized: All are in accordance with ASTM A 641, Class 1

Please Note - Electro Galvanized nails are not for use in cedar, cement board, redwood, most treated wood or exposed applications.

OUTDOOR CONSTRUCTION

- Outdoor Construction
All are in accordance with ASTM A153 Class D Standards and are suitable for most treated lumber
- Hot Dipped Galvanized
 - Hot Galvanized
 - Exterior Galvanized : Are in accordance with ESR-2914 and ASTM A153


PRIMEGUARD MAX

- Stainless Steel - AISI 304
- Stainless Steel - AISI 316 for marine applications

Grip-Rite Collated meet or exceed the ASTM F1667 Standard (if applicable).



TECHNICAL INFORMATION

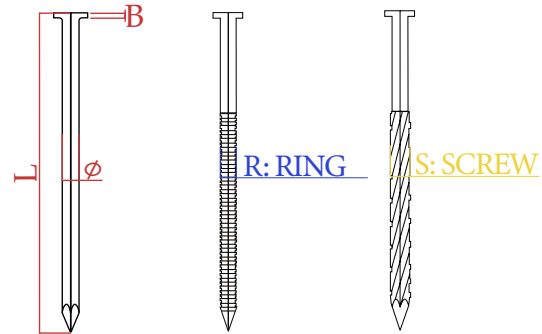


NAIL WIRE DIAMETER	CLIPPED HEAD DIAMETER(D)	CLIPPED HEAD DIAMETER(d)
0.113"	0.268"-0.305"	0.191"-0.210"
0.120"		0.200"-0.225"
0.131"		0.200"-0.225"

OFFSET HEAD DIAMETER(E)	HEAD THICKNESS(B)	SMOOTH(phi)
0.248"-0.272"	0.043"-0.063"	0.113"(+0/-0.004")
		0.120"(+0/-0.004")
		0.131"(+0/-0.004")

RING(R)	SCREW(S)	BEND YIELD, PSI
Ø(+0.004"-+0.008")	Ø(+0.004"-+0.008")	>100,000

NAILS/STRIP	NAIL LENGTH	LENGTH TOLERANCE(L)	FINISH
25	2"	2"(+/-1/16")	BRIGHT
25	2-3/8"	2.375"(+/-1/16")	ELECTRO GALV.
25	3"	3"(+/-3/32")	EXTERIOR GALV.
	3-1/4"	3.25"(+/-3/32")	HOT GALV.
	3-1/2"	3.5"(+/-3/32")	304 STAINLESS STEEL
			316 STAINLESS STEEL

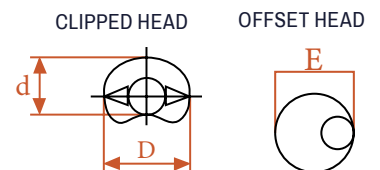



COLLATED 28° WIRE WELD NAILS

PRODUCT SPECIFICATIONS

ITEM#	DESCRIPTION	GROUP	LENGTH	DIAMETER	SHANK	PIECE	COATING
GRS6D	28° WIRE 2"X.113 CTD SMOOTH 2.5M	28° CH WIRE STRIP	2"	.113	SMOOTH	2.5M	BRIGHT COATED
GRS6DR	28° WIRE 2"X.113 CTD RING 2.5M	28° CH WIRE STRIP	2"	.113	RING	2.5M	BRIGHT COATED
GRS8D	28° WIRE 2 3/8"X.113 CTD SMOOTH 2.5M	28° CH WIRE STRIP	2-3/8"	.113	SMOOTH	2.5M	BRIGHT COATED
GRS8DR	28° WIRE 2 3/8"X.113 CTD RING 2.5M	28° CH WIRE STRIP	2-3/8"	.113	RING	2.5M	BRIGHT COATED
GRS10D	28° WIRE 3"X.120 CTD SMOOTH 2M	28° CH WIRE STRIP	3"	.120	SMOOTH	2M	BRIGHT COATED
GRS10DZ	28° WIRE 3"X.131 CTD SMOOTH 2M	28° CH WIRE STRIP	3"	.131	SMOOTH	2M	BRIGHT COATED
GRS12D	28° WIRE 3 1/4"X.120 CTD SMOOTH 2M	28° CH WIRE STRIP	3-1/4"	.120	SMOOTH	2M	BRIGHT COATED
GRS12DZ	28° WIRE 3 1/4"X.131 CTD SMOOTH 2M	28° CH WIRE STRIP	3-1/4"	.131	SMOOTH	2M	BRIGHT COATED
GRS16DZ	28° WIRE 3 1/2"X.131 CTD SMOOTH 2M	28° CH WIRE STRIP	3-1/2"	.131	SMOOTH	2M	BRIGHT COATED

ITEM#	DESCRIPTION	GROUP	LENGTH	DIAMETER	SHANK	PIECE	COATING
GRS8DRG	28° WIRE 2 3/8"X.113 EG RING 2.5M	28° CH WIRE STRIP	2-3/8"	.113	RING	2.5M	ELECTROGALVANIZED
GRS10DRG	28° WIRE 3"X.120 EG RING 2M	28° CH WIRE STRIP	3"	.120	RING	2M	ELECTROGALVANIZED
GRS8DRG	28° WIRE 2 3/8"X.113 EG RING 2.5M	28° CH WIRE STRIP	2-3/8"	.113	RING	2.5M	ELECTROGALVANIZED
GRS10DRG	28° WIRE 3"X.120 EG RING 2M	28° CH WIRE STRIP	3"	.120	RING	2M	ELECTROGALVANIZED

ITEM#	DESCRIPTION	GROUP	LENGTH	DIAMETER	SHANK	PIECE	COATING
GRS6DHG	28° WIRE 2"X.113 HG SMOOTH 2.5M	28° CH WIRE STRIP	2"	.113	SMOOTH	2.5M	HOT GALV.-EXTERIOR GALV.
GRS6DRHG	28° WIRE 2"X.113 HG RING 2.5M	28° CH WIRE STRIP	2"	.113	RING	2.5M	HOT GALV.-EXTERIOR GALV.
GRS8DHG	28° WIRE 2 3/8"X.113 HG SMOOTH 2.5M	28° CH WIRE STRIP	2-3/8"	.113	SMOOTH	2.5M	HOT GALV.-EXTERIOR GALV.
GRS8DRHG	28° WIRE 2-3/8"X.113 HG RING 2.5M	28° CH WIRE STRIP	2-3/8"	.113	RING	2.5M	HOT GALV.-EXTERIOR GALV.
GRS10DHG	28° WIRE 3"X.120 HG SMOOTH 2M	28° CH WIRE STRIP	3"	.120	SMOOTH	2M	HOT GALV.-EXTERIOR GALV.
GRS10DRHG	28° WIRE 3"X.120 HG RING 2M	28° CH WIRE STRIP	3"	.120	RING	2M	HOT GALV.-EXTERIOR GALV.
GRS12DHG	28° WIRE 3 1/4"X.120 HG SMOOTH 2M	28° CH WIRE STRIP	3-1/4"	.120	SMOOTH	2M	HOT GALV.-EXTERIOR GALV.
GRS12DRHG	28° WIRE 3 1/4"X.120 HG RING 2M	28° CH WIRE STRIP	3-1/4"	.120	RING	2M	HOT GALV.-EXTERIOR GALV.
GRS12DSHG	28° WIRE 3 1/4"X.120 HG SCREW 2M	28° CH WIRE STRIP	3-1/4"	.120	SCREW	2M	HOT GALV.-EXTERIOR GALV.
GRS16DZHG	28° WIRE 3 1/2"X.131 HG SMOOTH 2M	28° CH WIRE STRIP	3-1/2"	.131	SMOOTH	2M	HOT GALV.-EXTERIOR GALV.

ITEM#	DESCRIPTION	GROUP	LENGTH	DIAMETER	SHANK	PIECE	COATING
GRS6DRH	28° WIRE 2X.113 CTD SMOOTH RH 2.5M	28° OFFSET RH WIRE	2"	.113	SMOOTH	2.5M	BRIGHT COATED
GRS6DRRH	28° WIRE 2"X.113 CTD RING RH 2.5M	28° OFFSET RH WIRE	2"	.113	RING	2.5M	BRIGHT COATED
GRW8H1	28° RH WIRE 2-3/8"X.113 CTD SMOOTH 1M	28° OFFSET RH WIRE	2-3/8"	.113	SMOOTH	1M	BRIGHT COATED
GRW8RH1	28° RH WIRE 2-3/8"X.113 CTD RING 1M	28° OFFSET RH WIRE	2-3/8"	.113	RING	1M	BRIGHT COATED
GRS8DRRH	28° WIRE 2-3/8"X.113 CTD RING RH 2.5M	28° OFFSET RH WIRE	2-3/8"	.113	RING	2.5M	BRIGHT COATED
GRS8DYRH	28° WIRE 2-3/8X.120 CTD SMOOTH RH 2.5M	28° OFFSET RH WIRE	2-3/8"	.120	SMOOTH	2.5M	BRIGHT COATED
GRW8YRH1	28° RH WIRE 2-3/8"X.120 CTD RING 1M	28° OFFSET RH WIRE	2-3/8"	.120	RING	1M	BRIGHT COATED
GRS8DYRRH	28° WIRE 2-3/8"X.120 CTD RING RH 2.5M	28° OFFSET RH WIRE	2-3/8"	.120	RING	2.5M	BRIGHT COATED
GRW10H1	28° RH WIRE 3"X.120 CTD SMOOTH 1M	28° OFFSET RH WIRE	3"	.120	SMOOTH	1M	BRIGHT COATED
GRS10DRH	28° WIRE 3"X.120 CTD SMOOTH RH 2M	28° OFFSET RH WIRE	3"	.120	SMOOTH	2M	BRIGHT COATED
GRW10ZH1	28° RH WIRE 3" X.131 CTD SMOOTH 1M	28° OFFSET RH WIRE	3"	.131	SMOOTH	1M	BRIGHT COATED
GRW12H1	28° RH WIRE 3-1/4X.120 CTD SMOOTH 1M	28° OFFSET RH WIRE	3-1/4"	.120	SMOOTH	1M	BRIGHT COATED
GRS12DRH	28° WIRE 3-1/4X.120 CTD SMOOTH RH 2M	28° OFFSET RH WIRE	3-1/4"	.120	SMOOTH	2M	BRIGHT COATED
GRW12ZH1	28° RH WIRE 3-1/4" X.131 CTD SMOOTH 1M	28° OFFSET RH WIRE	3-1/4"	.131	SMOOTH	1M	BRIGHT COATED
GRS12DZRH	28° WIRE 3-1/4"X.131 CTD SMOOTH RH 2M	28° OFFSET RH WIRE	3-1/4"	.131	SMOOTH	2M	BRIGHT COATED
GRW16ZH1	28° RH WIRE 3-1/2X.131 CTD SMOOTH 1M	28° OFFSET RH WIRE	3-1/2"	.131	SMOOTH	1M	BRIGHT COATED
GRS16DZRH	28° WIRE 3-1/2X.131 CTD SMOOTH RH 2M	28° OFFSET RH WIRE	3-1/2"	.131	SMOOTH	2M	BRIGHT COATED



COLLATED 28° WIRE WELD NAILS

PRODUCT SPECIFICATIONS

ITEM#	DESCRIPTION	GROUP	LENGTH	DIAMETER	SHANK	PIECE	COATING
GRW6RHGH1	28° RH WIRE 2" X.113 HG RING 1M	28° OFFSET RH WIRE	2"	.113	RING	3.6M	HOT GALV.-EXTERIOR GALV.
GRS6DRRHG	28° WIRE 2"X.113 HG RING RH 2.5M	28° OFFSET RH WIRE	2"	.113	RING	2.5M	HOT GALV.-EXTERIOR GALV.
GRS8DHGRH	28° WIRE 2-3/8X.113 HG SMOOTH RH 2.5M	28° OFFSET RH WIRE	2-3/8"	.113	SMOOTH	2.5M	HOT GALV.-EXTERIOR GALV.
GRW8RHGH1	28° RH WIRE 2-3/8"X.113 HG RING 1M	28° OFFSET RH WIRE	2-3/8"	.113	RING	1M	HOT GALV.-EXTERIOR GALV.
GRS8DRRHG	28° WIRE 2-3/8"X.113 HG RING RH 2.5M	28° OFFSET RH WIRE	2-3/8"	.113	RING	2.5M	HOT GALV.-EXTERIOR GALV.
GRS8DYHGRH	28° WIRE 2-3/8X.120 HG SMOOTH RH 2.5M	28° OFFSET RH WIRE	2-3/8"	.120	SMOOTH	2.5M	HOT GALV.-EXTERIOR GALV.
GRW8YRHGH1	28° RH WIRE 2-3/8" X.120 HG RING 1M	28° OFFSET RH WIRE	2-3/8"	.120	RING	1M	HOT GALV.-EXTERIOR GALV.
GRS8YRRHG	28° WIRE 2-3/8"X.120 HG RING RH 2.5M	28° OFFSET RH WIRE	2-3/8"	.120	RING	2.5M	HOT GALV.-EXTERIOR GALV.
GRS10DRRHG	28° WIRE 3"X.120 HG SMOOTH RH 2M	28° OFFSET RH WIRE	3"	.120	SMOOTH	2M	HOT GALV.-EXTERIOR GALV.
GRW10RHGH1	28° RH WIRE 3" X.120 HG RING 1M	28° OFFSET RH WIRE	3"	.120	RING	1M	HOT GALV.-EXTERIOR GALV.
GRS10RRHG	28° WIRE 3"X.120 HG RING RH 2M	28° OFFSET RH WIRE	3"	.120	RING	2M	HOT GALV.-EXTERIOR GALV.
GRW10ZHGH1	28° RH WIRE 3" X.131 HG SMOOTH 1M	28° OFFSET RH WIRE	3"	.131	SMOOTH	1M	HOT GALV.-EXTERIOR GALV.
GRS12DRRHG	28° WIRE 3-1/4"X.120 HG SMOOTH RH 2M	28° OFFSET RH WIRE	3-1/4"	.120	SMOOTH	2M	HOT GALV.-EXTERIOR GALV.
GRW12ZHGH1	28° RH WIRE 3-1/4" X.131 HG SMOOTH 1M	28° OFFSET RH WIRE	3-1/4"	.131	SMOOTH	1M	HOT GALV.-EXTERIOR GALV.
GRS12ZRRHG	28° WIRE 3-1/4"X.131 HG SMOOTH RH 2M	28° OFFSET RH WIRE	3-1/4"	.131	SMOOTH	2M	HOT GALV.-EXTERIOR GALV.
GRS16ZRRHG	28° WIRE 3-1/2"X.131 HG SMOOTH RH 2M	28° OFFSET RH WIRE	3-1/2"	.131	SMOOTH	2M	HOT GALV.-EXTERIOR GALV.

ITEM#	DESCRIPTION	GROUP	LENGTH	DIAMETER	SHANK	PIECE	ALLOY
MAXC62890	2-3/8X120 28D W RD HEAD RS 304 1M	28° OFFSET RH WIRE	2-3/8"	.120	RING	1M	304 STAINLESS STEEL
MAXC62897	3 X 131 28D W RD HEAD RS 304 1M	28° OFFSET RH WIRE	3"	.131	RING	1M	304 STAINLESS STEEL
MAXC62911	3-1/4X131 28D W ROUND HD RS 304 1M	28° OFFSET RH WIRE	3-1/4"	.131	RING	1M	304 STAINLESS STEEL



Contact your PrimeSource® representative to order today
800-676-7777 | primesourcebp.com

WE BUILD AMERICA™