





# ShingleLayment

SYNTHETIC ROOFING UNDERLAYMENT

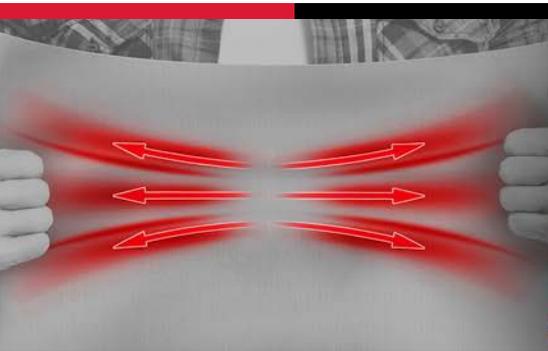

**EXTREME TEAR RESISTANCE**

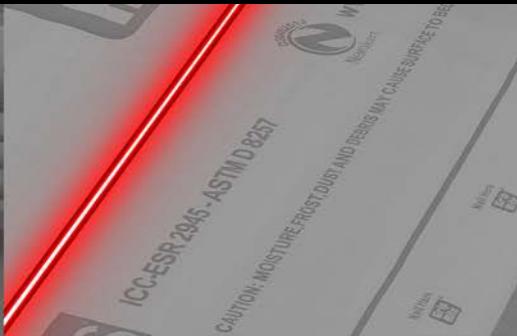

**EASY INSTALL**



**SUPERIOR TRACTION**

## PROTECTION YOU CAN STAND ON.

*Grip-Rite ShingleLayment® synthetic underlayment is a water shedding device designed to reduce the occurrence of leaks caused by wind-driven rain, approved for use under any code-compliant mechanically attached roofing application. ShingleLayment is ICC listed under ESR-2945 for compliance with AC 188 and ASTM D8257.*


### SHINGLELAYMENT-PREMIUM

- ✓ 5 times lighter than #30 felt
- ✓ 4.6 times more coverage than #30 felt
- ✓ 27 lbs. | 127 GSM | 8.5 Mil Thickness | 10x10 Scrim



### SHINGLELAYMENT-15 PRO

- ✓ DeckGrip™ Technology: EVA-coated non-skid backing enhances traction
- ✓ Heat-diffusing gray facer reduces surface temperature
- ✓ 21 lbs. | 95 GSM | 7.0 Mil Thickness | 8x8 Scrim

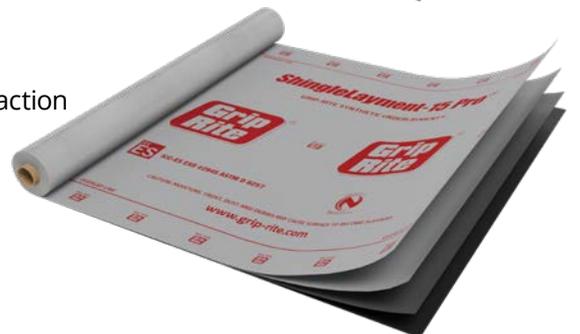

### SHINGLELAYMENT-LWE

- ✓ Lightweight roll that doesn't compromise on strength
- ✓ Heat-diffusing gray facer reduces surface temperature
- ✓ 19 lbs. | 85 GSM | 6.5 Mil Thickness | 8x8 Scrim



*ShingleLayment®-Premium and ShingleLayment®-LWE are also available with our patented shingle-print pattern. Patent #9,982,438. For more information and to order, contact your PrimeSource representative.*



PROPERTY	TEST METHOD	ASTM D8257	SHINGLELAYMENT-PREMIUM	SHINGLELAYMENT-15 PRO	SHINGLELAYMENT-LWE
Water Vapor Transmission (Perms)	ASTM E96 Procedure B	Report	0.0933	0.086	0.13
Linear Dimensional Change MD (%)	ASTM D1204	-2.5 to 1	-1.9	-1.9	-2.4
Linear Dimensional Change XMD (%)	ASTM D1204	-2.5 to 1	-2.5	-1.8	-2.1
Tensile Strength MD (LBF/IN)	ASTM D5035	>20	61	77	87
Tensile Strength XMD (LBF/IN)	ASTM D5035	>20	61	58	66
Tear Strength MD (LBF)	ASTM D4533	>15	37	30	32
Tear Strength XMD (LBF)	ASTM D4533	>15	33	23	29
Fastener Pull-through Resistance (LBF)	ASTM D228	≥25	59	50	47
Hydrostatic Resistance	ASTM D751 Method A	No water penetration	PASS	PASS	PASS
Unit Weight (GSM)	Direct Measurement	GSM	127	95	85

LBF = pounds of force/foot  
 Specifications subject to change without notice.

## PRODUCT PACKAGING

PRODUCT	SKU	AREA	DIMENSIONS	COLOR	WEIGHT/ROLL	PALLET QTY	PALLET/TL	ROLLS/TL
ShingleLayment-Premium	SLT154250PRI	10 SQ	4' x 250'	Tan	27 lbs	49	32	1568
ShingleLayment-15 Pro	SL154250GRP	10 SQ	4' x 250'	Gray	21 lbs	64	32	2048
ShingleLayment-LWE	SL154250LWE	10 SQ	4' x 250'	Gray	19 lbs	72	33	2376

## CERTIFICATIONS AND TESTING

- ICC AC 188 – ESR-2945
- ASTM D226
- ASTM D8257
- ASTM D4869 Type IV
- Class A Fire Tested
- CAN CSA A123.3-05
- Miami Dade NOA #24-0610.01
- Florida FBC #FPA 12510

**PRIME SOURCE**  
 BUILDING PRODUCTS, INC.

A PrimeSource Brands Company  PRIME SOURCE BRANDS

Contact your PrimeSource® Building Products representative to order today.  
**800-676-7777 | primesourcebp.com**

Grip-Rite ShingleLayment® is exclusively distributed by PrimeSource® Building Products, Inc. 1321 Greenway Drive, Irving, TX 75038-2504. Visit [grip-rite.com](http://grip-rite.com) or call 800-676-7777 for details, warranty information and limitations. Pricing and availability are subject to change without notice. © 2026 PrimeSource® Building Products, Inc. All Rights Reserved.

GRSLSS-0126-795752