



# EAVE & VALLEY PROTECTOR

**Grip-Rite® Eave & Valley Protector** provides additional protection against roof damage caused by ice and water. Install beneath shingles, along with areas where water may collect such as around chimneys, valleys, vents, skylights, or other similar areas.

Without proper drainage, water can accumulate and form ice dams, which cause more water to stay on the roof. Moisture on a roof can eventually work its way underneath the shingles to the roof deck and ultimately to the interior of the structure, causing additional damage.


- ✓ 53 mil thick self-adhesive membrane composed of elastomeric bitumen with glass mat reinforcement
- ✓ Easy-to-remove silicone treated release sheet (split-back) on the self-adhesive side

### Recommended Uses:

Roof edges and valley vulnerable to water leaks due to ice accumulation or strong wind

### Benefits:

- ✓ Non-slip, sanded finish
- ✓ Self-sealing around nails and screws
- ✓ Effective and hard-wearing
- ✓ Clean and easy to install
- ✓ No primer required
- ✓ Consistent thickness
- ✓ Requires no special tools
- ✓ Remains stable in outdoor temperatures
- ✓ Meets ASTM standards

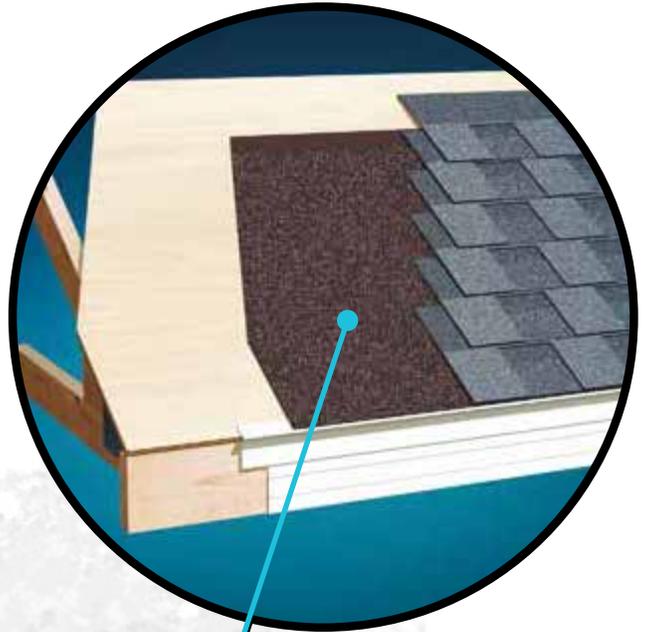

**Grip-Rite Eave & Valley Protector**

Available in box or labeled roll



| SKU       | Size                         |                 | Package Type | Rolls/Pallet | Approximate Coverage |                        |
|-----------|------------------------------|-----------------|--------------|--------------|----------------------|------------------------|
|           | Area                         | Dimensions      |              |              | Per Box or Roll      | Per Pallet             |
| GRWR1SQ   | 1 SQ (99 ft. <sup>2</sup> )  | 36 in. x 33 ft. | Box          | 49           | 99 ft. <sup>2</sup>  | 3,564 ft. <sup>2</sup> |
| GRWR2SQ   | 2 SQ (195 ft. <sup>2</sup> ) | 36 in. x 65 ft. | Box          | 25           | 195 ft. <sup>2</sup> | 4,875 ft. <sup>2</sup> |
| GRWR2SQNB | 2 SQ (195 ft. <sup>2</sup> ) | 36 in. x 65 ft. | Labeled Roll | 36           | 195 ft. <sup>2</sup> | 7,020 ft. <sup>2</sup> |



# EAVE & VALLEY PROTECTOR

## Application:

- Install roof covering as soon as possible following membrane installation.
- Cover surface with plywood or OSB panels prior to the membrane installation.
- Although it is not mandatory, the use of a primer enhances the adhesion strength of self-adhesive membranes. Please contact PrimeSource Building Products, Inc. at 800-676-7777 for a list of approved surfaces, their preparation and the use of primer.
- Minimum application temperature: 40°F

## Restrictions:

- Not recommended under metal roofing.
- If used on the whole roof surface, membrane should be applied over a proper ventilated space. Please refer to building codes for more information.
- Do not apply directly onto wood planks.
- It is not recommended to use an elastomeric bitumen membrane directly on softwood boards or on flexible polyvinyl chloride.

See installation guide or packaging for complete installation instructions.

| Eave & Valley Protector Specifications |                |            |                                    |
|--|----------------|------------|------------------------------------|
| Property                               |                | Standards  | Eave & Valley Protector            |
| Thickness                              |                | —          | 53 mil                             |
| Dimensions                             | 1 SQ           | —          | 36 in. x 33 ft.                    |
|  | 2 SQ & 2 SQ NB | —          | 36 in. x 65 ft.                    |
| Roll Weight                            | 1 SQ           | —          | 30.0 lb.                           |
|  | 2 SQ & 2 SQ NB | —          | 60.0 lb.                           |
| Top face                               |                | —          | Sand                               |
| Underface                              |                | —          | Silicone release film (split-back) |
| Reinforcement                          |                | ASTM D1970 | Glass mat                          |
| Tensile strength, MD/XD                |                | ASTM D1970 | 61 / 46 lbf/in.                    |
| Ultimate elongation, MD/XD             |                | ASTM D1970 | 16 / 14%                           |
| Adhesion to plywood, 75.2°F            |                | ASTM D1970 | 14.5 lbf/ft.                       |
| Thermal stability, 14 days @ 158°F     |                | ASTM D1970 | <2.5 mm (<0.1 in.)                 |
| Low temperature flexibility            |                | ASTM D1970 | Pass at -20°F/-29°C                |
| Tear resistance                        |                | ASTM D1970 | 90 / 79 lbf                        |
| Nail sealability                       |                | ASTM D1970 | Pass                               |
| Static puncture                        |                | ASTM D5602 | 31 lbf                             |

lbf= pounds-force/foot Specifications subject to change without notice.



800-676-7777  
[www.grip-rite.com](http://www.grip-rite.com)  
[www.primesourcebp.com](http://www.primesourcebp.com)