



EAVE AND VALLEY PROTECTOR




Grip-Rite® Eave and Valley Protector provides additional protection against roof damage caused by ice and water. This 53-mil self-adhesive membrane is composed of elastomeric bitumen with glass mat reinforcement to create a non-slip surface. Install beneath shingles, and along areas where water may collect. The easy-to-remove silicone treated split-back release sheet makes it easy to install and quickly provides protection to the most vulnerable areas of the roof.

FEATURES AND BENEFITS

- Easy to install with no primer required
- Non-slip, sanded finish
- Self-sealing around nails and screws
- Consistent thickness
- Requires no special tools
- Remains stable in outdoor temperatures
- Meets ASTM standards

APPLICATIONS

- Eaves
- Valleys
- Chimneys
- Vents
- Skylights
- Other similar areas

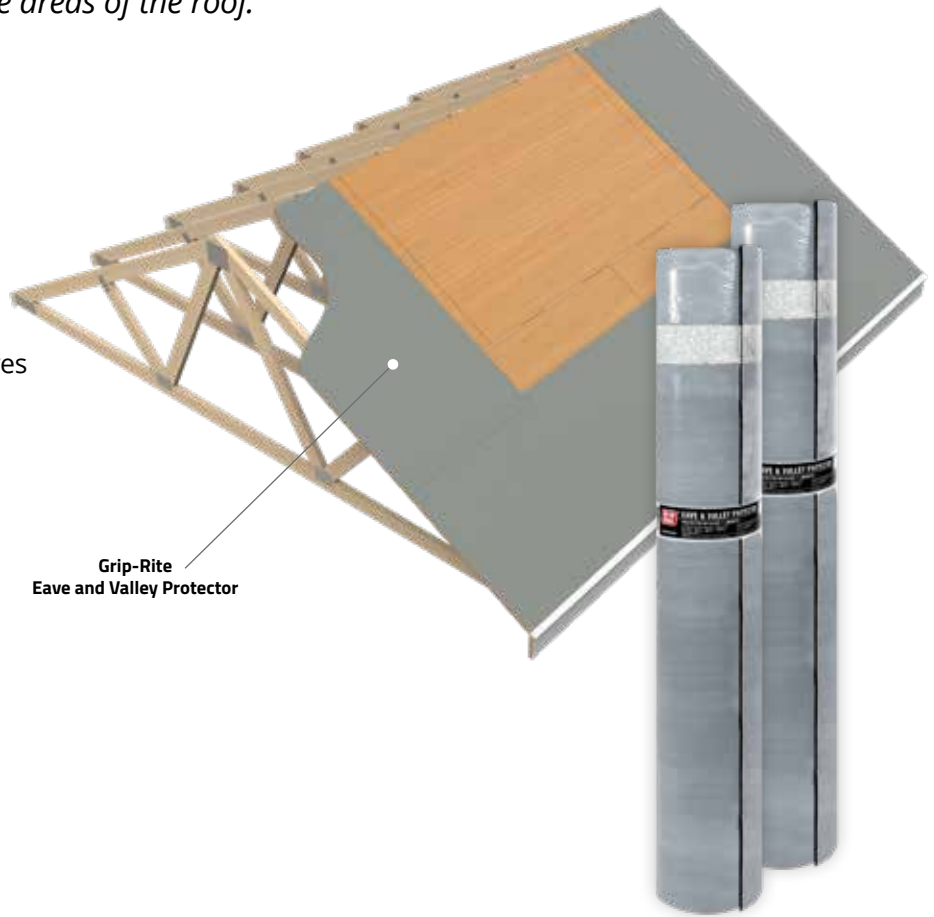

SKU	AREA	DIMENSIONS	ROLLS/PALLET	COVERAGE/ROLL	COVERAGE/PALLET
GRWR2SQNB	2 SQ	36" x 65'	36	195 ft. ²	7,020 ft. ²



INSTALLATION

- Install roof covering as soon as possible following membrane installation.
- Cover surface with plywood or OSB panels prior to the membrane installation.
- Although not mandatory, the use of a primer enhances the adhesion strength of self-adhesive membranes. Contact PrimeSource Building Products, Inc. at 800-676-7777 for a list of approved surfaces, their preparation and the use of primer.
- Minimum application temperature: 40°F

RESTRICTIONS

- Not recommended under metal roofing.
- If used on the whole roof surface, membrane should be applied over a proper ventilated space.
- Please refer to building codes for more information.
- Do not apply directly onto wood planks.
- It is not recommended to use an elastomeric bitumen membrane directly on softwood boards or on flexible polyvinyl chloride.

PROPERTY	STANDARDS	EAVE AND VALLEY PROTECTOR
Thickness	--	53 mil.
Roll Weight	--	60 lbs.
Top Face	--	Sand
Underface	--	Silicone Release Film (Split-Back)
Reinforcement	ASTM D1970	Glass Mat
Tensile Strength, MD/XD	ASTM D1970	61 / 46 LBF/in.
Ultimate Elongation, MD/XD	ASTM D1970	16 / 14%
Adhesion to Plywood, 75.2° F	ASTM D1970	14.5 LBF/ft.
Thermal Stability, 14 days @ 158° F	ASTM D1970	<2.5 mm (<0.1 in.)
Low Temperature Flexibility	ASTM D1970	Pass at -20°F/-29°C
Tear Resistance	ASTM D1970	90 / 79 LBF
Nail Sealability	ASTM D1970	Pass
Static Puncture	ASTM D5602	31 LBF

LBF = pounds of force/foot
 Specifications subject to change without notice.



This product is qualified for use as a component of a FORTIFIED-eligible roof system. Use of this product does not guarantee a FORTIFIED™ designation. To be eligible for a FORTIFIED designation, a complete roofing system (components and accessories) must meet the requirements detailed in the FORTIFIED Home™ Standard and be installed by a certified FORTIFIED Roofing Contractor. Products that are required to meet the standard include but may not be limited to: roof coverings, attic ventilation components, a qualified sealed roof deck system, roof underlayments, edge metal and appropriate fasteners for all mechanically fastened components. Documentation for all products and their installation is required. Additional requirements, eligibility criteria and restrictions apply. See the current FORTIFIED Home standard at <https://fortifiedhome.org/technical-documents/> for details.



A PrimeSource Brands Company  PRIME SOURCE BRANDS

Contact your PrimeSource® Building Products representative to order today.
800-676-7777 | primesourcebp.com

Grip-Rite® Eave and Valley Protector is exclusively distributed by PrimeSource® Building Products, Inc. 1321 Greenway Drive, Irving, TX 75038-2504. Visit grip-rite.com or call 800-676-7777 for details, warranty information and limitations. Pricing and availability are subject to change without notice.
 © 2026 PrimeSource® Building Products, Inc. All Rights Reserved.

GREVPSS-061526-906550