



## COLLATED 15° WIRE WELD COIL NAILS

Grip-Rite® 15° Wire Weld Coil Nails are designed for use in siding, fencing, framing, and general construction applications. The wire weld collation and on-center head design minimize jamming for efficient operation.

## PRODUCT FEATURES AND SPECIFICATIONS

#### GENERAL CONSTRUCTION

- Bright Coated
- Electrogalvanized: All are in accordance with ASTM A 641, Class 1

Electrogalvanized nails are not for use in cedar, cement board, redwood, most treated wood or exposed applications.

#### OUTDOOR CONSTRUCTION


In accordance with ASTM A153 Class D
 Standards and are suitable for most treated lumber

Hot Dipped Galvanized Hot Galvanized Exterior Galvanized

Exterior Galvanized does not meet ASTM A153 Class D

#### PRIMEGUARD MAX®

- Stainless Steel AISI 304
- Stainless Steel AISI 316 for marine applications Grip-Rite collated nails meet or exceed the ASTM F1667 Standard (if applicable).

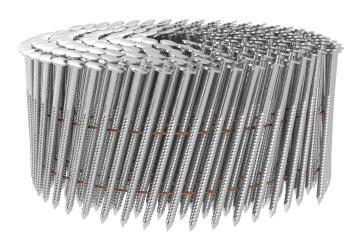



NAIL WIRE DIAMETER (Ø)	HEAD DIAMETER (D)	HEAD THICKNESS (B)
0.099"	0.248" - 0.268"	0.025" - 0.035"
0.113"	0.268" - 0.285"	0.039" - 0.049"
0.120"	0.268" - 0.285"	0.039" - 0.049"
0.131"	0.268" - 0.285"	0.043" - 0.059"

NAIL SHANK	BEND YIELD, PSI	NAILS/COIL							
SMOOTH (Ø)									
0.099" (+0/-0.004")	100,000	250							
0.113" (+0/-0.004")	100,000	225							
0.120" (+0/-0.004")	100,000	200							
0.131" (+0/-0.004")	100,000	200							
	RING (Ø)								
0.099" (+0/-0.004")	100,000	250							
0.113" (+0/-0.004")	100,000	225							
0.120" (+0/-0.004")	100,000	200							
0.131" (+0/-0.004")	100,000	200							
	SCREW								
0.120" (+0/-0.004")	100,000	200							
0.131" (+0/-0.004")	100,000	200							

NAIL LENGTH	LENGTH TOLERANCE (L)
1-1/2"	1.500" (+0/-0.060")
2"	2.000" (+0/-0.060")
2-1/4"	2.250" (+0/-0.060")
2-3/8"	2.375" (+0/-0.060")
2-1/2"	2.500" (+0/-0.060")
3"	3.000" (+0/-0.060")
3-1/4"	3.250" (+0/-0.060")

COATING/FINISH
BRIGHT
ZINC COATED
ELECTROGALVANIZED
HOT DIPPED GALVANIZED
HOT GALVANIZED
304 STAINLESS STEEL







ALL PRIMESOURCE® FASTENERS ARE MANUFACTURED IN AN ISO 9001 CERTIFIED AND APPROVED FACTORY TO PRIMESOURCE® PERFORMANCE SPECIFICATIONS AND PRINT DRAWINGS.



### COLLATED 15° WIRE WELD COIL NAILS

### **PRODUCT SPECIFICATIONS**

ITEM#	DESCRIPTION	GROUP	LENGTH	DIAMETER	SHANK	PIECE	COATING/FINISH
GRC4P99ST	15° WIRE 1-1/2" x .099" SMOOTH STIFF	15° WIRE COIL	1-1/2"	.099"	SMOOTH	4.5M	BRIGHT
GRC4P113ST	15° WIRE 1-1/2" x .113" SMOOTH STIFF	15° WIRE COIL	1-1/2"	.113"	SMOOTH	4.5M	BRIGHT
GRC6P99D9	15° WIRE 2" x .099" CTD RING	15° WIRE COIL	2"	.099"	RING	3M	BRIGHT
GRC6R99D9	15° WIRE 2-1/4" x .113" SMOOTH STIFF	15° WIRE COIL	2-1/4"	.113"	SMOOTH	4.5M	BRIGHT
GRC7P99ST	15° WIRE 2-3/8" x .099" CTD SMOOTH	15° WIRE COIL	2-3/8"	.099"	SMOOTH	3M	BRIGHT
GRC7P113ST	15° WIRE 2-3/8" x .099" CTD RING	15° WIRE COIL	2-3/8"	.099"	RING	3M	BRIGHT
GRC8PD	15° WIRE 2-3/8" x .113" CTD RING	15° WIRE COIL	2-3/8"	.113"	RING	3M	BRIGHT

ITEM#	DESCRIPTION	GROUP	LENGTH	DIAMETER	SHANK	PIECE	COATING/FINISH
GRC6P99DGZ	15° WIRE 2" x .099" ZINC CTD SM	15° WIRE COIL	2"	.099"	SMOOTH	3M	ZINC
GRC6R99DGZ	15° WIRE 2" x .099" ZINC CTD RING	15° WIRE COIL	2"	.099"	RING	3M	ZINC
GRC8P99DGZ	15° WIRE 2-3/8" x .099" EG SMOOTH	15° WIRE COIL	2-3/8"	.099"	SMOOTH	3M	ZINC
GRC8R99DGZ	15° WIRE 2-3/8" x .099" ZINC CTD RING	15° WIRE COIL	2-3/8"	.099"	RING	3M	ZINC
GRC8RDGZ	15° WIRE 2-3/8" x .113" ZINC CTD RING	15° WIRE COIL	2-3/8"	.113"	RING	3M	ZINC
GRC8PZDGZ	15° WIRE 2-1/2" x .131" EG SMOOTH	15° WIRE COIL	2-1/2"	.131"	SMOOTH	3M	ZINC
GRC8RZDGZ	15° WIRE 2-1/2" x .131" ZINC CTD RING	15° WIRE COIL	2-1/2"	.131"	RING	3M	ZINC
GRC10PDGZ	15° WIRE 3" x .120" ZINC CTD SM	15° WIRE COIL	3"	.120"	SMOOTH	2.5M	ZINC
GRC10RDGZ	15° WIRE 3" x .120" ZINC CTD RING	15° WIRE COIL	3"	.120"	RING	2.5M	ZINC
GRC12PDGZ	15° WIRE 3-1/4" x .120" ZINC CTD SM	15° WIRE COIL	3-1/4"	.120"	SMOOTH	2.5M	ZINC
GRC12RDGZ	15° WIRE 3-1/4" x.120" ZINC CTD RING	15° WIRE COIL	3-1/4"	.120"	RING	2.5M	ZINC
GRC12PZDGZ	15° WIRE 3-1/4" x .131" ZINC CTD SMOOTH	15° WIRE COIL	3-1/4"	.131"	SMOOTH	2.5M	ZINC
GRC8RD45MGZ	15° WIRE 2-3/8" x .113" ZINC CTD RING	15° WIRE COIL	2-3/8"	.131"	RING	4.5M	ZINC
GRC8PD5MGZ	15° WIRE 2-3/8" x .113" ZINC CTD SMOOTH	15° WIRE COIL	2-3/8"	.131"	SMOOTH	5M	ZINC
GRC8RDG5Z	15° WIRE 2-3/8" x .113" ZINC CTD RING	15° WIRE COIL	2-3/8"	.131"	RING	5M	ZINC
GRC8RZDG45Z	15° WIRE 2-1/2" x .131" ZINC CTD RING	15° WIRE COIL	2-1/2"	.131"	RING	4.5M	ZINC
GRC8SZDG45Z	15° WIRE 2-1/2" x .131" ZINC CTD SCREW	15° WIRE COIL	2-1/2"	.131"	SCREW	4.5M	ZINC
GRC10PDG4Z	15° WIRE 3" x .120" ZINC CTD SMOOTH	15° WIRE COIL	3"	.120"	SMOOTH	4M	ZINC
GRC10PD45GZ	15° WIRE 3" x .120" ZINC CTD SMOOTH	15° WIRE COIL	3"	.120"	SMOOTH	4.5M	ZINC
GRC10PZDG4Z	15° WIRE 3" x .131" ZINC CTD SMOOTH	15° WIRE COIL	3"	.131"	SMOOTH	4M	ZINC
GRC12PD4MGZ	15° WIRE 3-1/4" x .120" ZINC CTD SMOOTH	15° WIRE COIL	3-1/4"	.120"	SMOOTH	4M	ZINC
GRC12PZD4GZ	15° WIRE 3 1/4" x .131" ZINC CTD SMOOTH	15° WIRE COIL	3-1/4"	.131"	SMOOTH	4M	ZINC

ITEM#	DESCRIPTION	GROUP	LENGTH	DIAMETER	SHANK	PIECE	COATING/FINISH
GRC8P99DG	15° WIRE 2-3/8" x .099" EG RH SMOOTH	15° WIRE COIL	2-3/8"	.099"	SMOOTH	3M	ELECTROGALVANIZED
GRC8R99DG	15° WIRE 2-3/8" x .099" EG RH RING	15° WIRE COIL	2-3/8"	.099"	RING	3M	ELECTROGALVANIZED
GRC8RDG	15° WIRE 2-3/8" x .013" EG RH RING	15° WIRE COIL	2-3/8"	.113"	RING	3M	ELECTROGALVANIZED
GRC8RDG45	15° WIRE 2-3/8" x .013" EG RH RING	15° WIRE COIL	2-3/8"	.113"	RING	4.5M	ELECTROGALVANIZED
GRC10RDG	15° WIRE 3" x .120" EG RH RING	15° WIRE COIL	3"	.120"	RING	2.5M	ELECTROGALVANIZED
GRC12RDG	15° WIRE 3-1/4" x .120" EG RH RING	15° WIRE COIL	3-1/4"	.120"	RING	2.5M	ELECTROGALVANIZED

ITEM#	DESCRIPTION	GROUP	LENGTH	DIAMETER	SHANK	PIECE	COATING/FINISH
GRC6R99DHG	15° WIRE 2" x .099" HG RING	15° WIRE COIL	2"	.099"	RING	3.6M	HOT GALVANIZED- EXTERIOR GALVANIZED
GRC8P99DHG	15° WIRE 2-3/8" x .099" HG SMOOTH	15° WIRE COIL	2-3/8"	.099"	SMOOTH	3.6M	HOT GALVANIZED- EXTERIOR GALVANIZED
GRC8RDHG5	15° WIRE 2-3/8" x .113" HG RH RING	15° WIRE COIL	2-3/8"	.131"	RING	5M	HOT GALVANIZED- EXTERIOR GALVANIZED
GRC8R99DHG	15° WIRE 2-3/8" x .099" HG RING	15° WIRE COIL	2-3/8"	.099"	RING	9М	HOT GALVANIZED- EXTERIOR GALVANIZED
GRC8RDHG	15° WIRE 2-3/8" x .113" HG RING	15° WIRE COIL	2-3/8"	.113"	RING	7.2M	HOT GALVANIZED- EXTERIOR GALVANIZED





# COLLATED 15° WIRE WELD COIL NAILS

#### **PRODUCT SPECIFICATIONS**

ITEM#	DESCRIPTION	GROUP	LENGTH	DIAMETER	SHANK	PIECE	COATING/FINISH
GRC8PZDHGR4	15° WIRE 2-1/2" x .131" HG RH RING	15° WIRE COIL	2-1/2"	.131"	RING	4M	HOT GALVANIZED- EXTERIOR GALVANIZED
GRC8PZD45HGR	15° WIRE 2-1/2" x .131" HG RING	15° WIRE COIL	2-1/2"	.131"	RING	4.5M	HOT GALVANIZED- EXTERIOR GALVANIZED
GRC8PZD45HG	15° WIRE 2-1/2" x .131" HG SMOOTH	15° WIRE COIL	2-1/2"	.131"	SMOOTH	7.2M	HOT GALVANIZED- EXTERIOR GALVANIZED
GRC10PDHG	15° WIRE 3" x .120" HG SMOOTH	15° WIRE COIL	3"	.120"	SMOOTH	2.5M	HOT GALVANIZED- EXTERIOR GALVANIZED
GRC10RDHG	15° WIRE 3" x .120" HG RING	15° WIRE COIL	3"	.120"	RING	2.5M	HOT GALVANIZED- EXTERIOR GALVANIZED
GRC10PDHG4	15° WIRE 3" x .120" HG RH SMOOTH	15° WIRE COIL	3"	.120"	SMOOTH	4M	HOT GALVANIZED- EXTERIOR GALVANIZED
GRC10RDHG4	15° WIRE 3" x .120" HG RH RING	15° WIRE COIL	3"	.120"	RING	4M	HOT GALVANIZED- EXTERIOR GALVANIZED
GRC10PZDHG	15° WIRE 3" x .131" HG RH SMOOTH	15° WIRE COIL	3"	.131"	SMOOTH	2.5M	HOT GALVANIZED- EXTERIOR GALVANIZED
GRC12RDHG	15° WIRE 3-1/4" x .120" HG RING	15° WIRE COIL	3-1/4"	.120"	RING	2.5M	HOT GALVANIZED- EXTERIOR GALVANIZED
GRC12PDHG	15° WIRE 3-1/4" x .120" HG SMOOTH	15° WIRE COIL	3-1/4"	.120"	SMOOTH	2.5M	HOT GALVANIZED- EXTERIOR GALVANIZED
GRC12PHG4	15° WIRE 3-1/4" x .120" HG RH SMOOTH	15° WIRE COIL	3-1/4"	.120"	SMOOTH	4M	HOT GALVANIZED- EXTERIOR GALVANIZED
GRC12PZDHG4	15° WIRE 3-1/4" x .131" HG RH SMOOTH	15° WIRE COIL	3-1/4"	.131"	SMOOTH	4M	HOT GALVANIZED- EXTERIOR GALVANIZED

ITEM#	DESCRIPTION	GROUP	LENGTH	DIAMETER	SHANK	PIECE	ALLOY
MAXC62817	15° WIRE 1-1/4" x .090" RS WOOD SID 304	15° WIRE COIL	1-1/4"	.090"	RING	3.6M	304 STAINLESS STEEL
MAXC62815	15° WIRE 1-1/2" x .090" RS WOOD SID 316	15° WIRE COIL	1-1/2"	.090"	RING	1.8M	316 STAINLESS STEEL
MAXC62816	15° WIRE 1-1/2" x .090" RS WOOD SID 304	15° WIRE COIL	1-1/2"	.090"	RING	3.6M	304 STAINLESS STEEL
MAXC70130	15° PLASTIC 1-1/2" x .092" RS WOOD SID 316	15° PLASTIC COIL	1-1/2"	.092"	RING	.6M	316 STAINLESS STEEL
MAXC62819	15° WIRE 1-3/4" x .090" RS WOOD SID 316	15° WIRE COIL	1-3/4"	.090"	RING	1.8M	316 STAINLESS STEEL
MAXC62818	15° WIRE 1-3/4" x .090" RS WOOD SID 304	15° WIRE COIL	1-3/4"	.090"	RING	3.6M	304 STAINLESS STEEL
MAXC62821	15° WIRE 2" x .090" RS FBRCMT/WOOD SDG 316	15° WIRE COIL	2"	.090"	RING	1.8M	316 STAINLESS STEEL
MAXC62820	15° WIRE 2" x .090" RS FBRCMT/WOOD SDG 304	15° WIRE COIL	2"	.090"	RING	3.6M	304 STAINLESS STEEL
MAXC70131	15° PLASTIC 2" x .092" RS FBRCMT/WD SDG 316	15° PLASTIC COIL	2"	.092"	RING	.6M	316 STAINLESS STEEL
MAXC62822	15° WIRE 2" x .113" RS 304	15° WIRE COIL	2"	.113"	RING	3.6M	304 STAINLESS STEEL
MAXC62826	15° WIRE 2-3/16" x .090" RS FBRCT/WD SD 316	15° WIRE COIL	2-3/16"	.090"	RING	1.8M	316 STAINLESS STEEL
MAXC62827	15° WIRE 2-3/16" x .090" RS FBRCT/WD SD 304	15° WIRE COIL	2-3/16"	.090"	RING	3.6M	304 STAINLESS STEEL
MAXC62824	15° WIRE 2-1/2" x .090" RS WOOD SID 316	15° WIRE COIL	2-1/2"	.090"	RING	1.8M	316 STAINLESS STEEL
MAXC62823	15° WIRE 2-1/2" x .090" RS WOOD SID 304	15° WIRE COIL	2-1/2"	.090"	RING	3.6M	304 STAINLESS STEEL
MAXC62825	15° WIRE 2-1/2" x .113" RS 304	15° WIRE COIL	2-1/2"	.113"	RING	3.6M	304 STAINLESS STEEL
MAXC64428	15° WIRE 2-3/16" x .090" RS WOOD SID 304	15° WIRE COIL	2-3/16"	.090"	RING	3.6M	304 STAINLESS STEEL
MAXC70132	15° PLASTIC 2-1/2" x .092" RS WOOD SID 316	15° PLASTIC COIL	2-1/2"	.092"	RING	.6M	316 STAINLESS STEEL
MAXC62828	15° WIRE 3" x .120" 15D W RS 304	15° WIRE COIL	3"	.120"	RING	1.8M	304 STAINLESS STEEL
MAXC64432	15° WIRE 3-1/4" x .120" 15D W RS 304	15° WIRE COIL	3-1/4"	.120"	RING	2.5M	304 STAINLESS STEEL



A PrimeSource Brands Company

PSB PRIMESOURCE
BRANDS\*

Contact your PrimeSource Building Products representative to order today.
800-676-7777 | primesourcebp.com

Scan for Information

