




NINJA™ STARTER CLIP

PRIMEGUARD MAX® STAINLESS
LIFETIME GUARANTEE*

INSTALLATION INSTRUCTIONS

For Use with Wolf®, TREX® and Fiberon® Deck Boards**
Follow deck board manufacturer's installation recommendations.

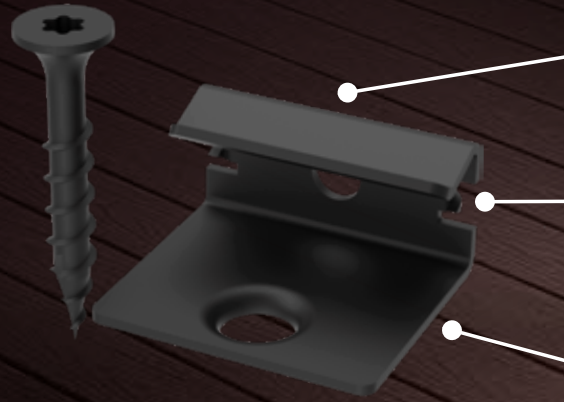

STRENGTH

Coated #316 Grade
Stainless Steel for
Durable Longevity


SECURITY

Grip-Bite™ Teeth for
Locked-In Grip

SPEED

Fast and Easy for
Seamless Installation

GRNINSTART25

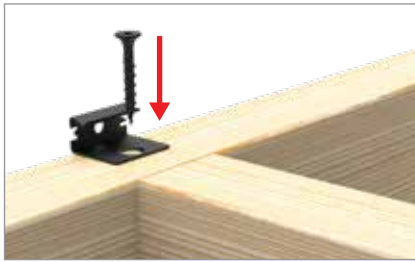

1. Align the back of the Grip-Rite Ninja™ Starter Clip with the ledger board (or rim joist), centered on the cross-joist.



4. To install grooved deck boards, align the board at a slight upward angle to the clip.



2. Using the provided screws, secure the clip in place.



5. Slide the board into the clip, then lower it until it's flush with the ledger board and joists.



3. Repeat this process at each joist along the ledger board.



6. The Grip-Bite™ teeth will engage with the board, securing it in place.

PRIMESOURCE
BUILDING PRODUCTS, INC.

A PrimeSource Brands Company PRIME**SOURCE**
BRANDS

Grip-Rite Ninja™ Starter Clips are exclusively distributed by
PrimeSource Building Products, Inc.
1321 Greenway Drive, Irving, TX 75038-2504 USA
800-676-7777
www.grip-rite.com • www.primesourcebp.com
© 2025 PrimeSource Building Products, Inc.
Made in China/Hecho en China

Coverage: 1 box of 90 PCS. of Grip-Rite Ninja™ Starter Clips covers approximately 30 linear feet with 16-inch on-center joist spacing.

*For warranty details, visit www.grip-rite.com/ninja-clip-warranty

**The Grip-Rite Ninja™ Starter Clip is not endorsed by TREX® or Fiberon®. PrimeSource Building Products, Inc., the importer/manufacturer of this product is not affiliated in any way with TREX® or Fiberon®. Grip-Rite® is a trademark of PrimeSource Building Products, Inc. Other product and company names listed may be trademarks of their respective owners. Follow manufacturers recommended installation instructions.



View helpful
Installation video

GRNINSTART25-100224-626358-A