

FASTER. DEEPER. STRONGER.

WHY PROS CHOOSE SPEEDSPIKE™



Engineered for Speed

Over 5-times faster* than hand-driven installs



Deeper Embedment

Drives full 2" into the stud



Stronger Holding Power**

Ring shank design ensures secure grip in wood studs



Multi-Tool Compatible

Designed to work with 21° framing nailers like the Bostitch® BRT130, Max® HS130, and Fasco® F91AC RHN20-160



Jam-Free Guarantee®

Protected by the Grip-Rite® 6-month no-jam warranty

SPIKE I



Ideal for use in:

• Extreme climates to maximize insulation and keep heat or cold where it belongs.


Recommended Insulation Systems:

- ZIP System® R-6, R-9, R-12
- Atlas EnergyShield® Ply Pro (2" or more)
- LP[®] NovaCore[™] (2" or more)
- and other rigid foam continuous insulation systems




SpeedSpike[™] – 4½" x .148" (Plastic Collated)

Insulated Sheathing Layers

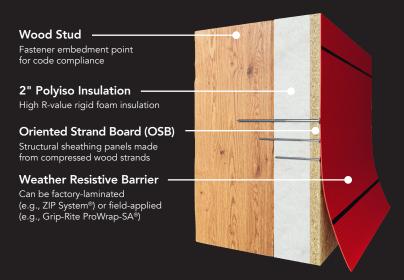

Grip-Rite ProWrap-SA® (Field-applied)

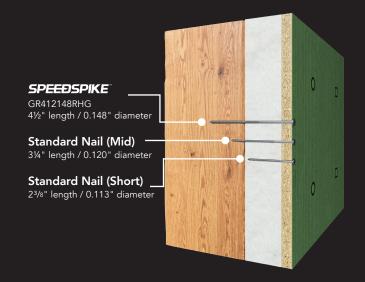

ZIP System® R-Sheathing (Factory-laminated)

Quick Specs

SKU	DESCRIPTION	PACK QTY	UPC
GR412148RHG	SpeedSpike™ Collated Insulated Sheathing Nail, 4½" × 0.148", Ring Shank, Hot Galvanized 21° Plastic Strip	2,000	764666835863

Package: 9.76 in. L × 9.76 in. W × 6.5 in. H • 41.67 lb.







Contact your PrimeSource Building Products' representative to order today 800-676-7777 | primesourcebp.com