



# COLLATED 15° WIRE WELD COIL NAILS

## GENERAL CONSTRUCTION

- Bright Coated
- Electrogalvanized: All are in accordance with ASTM A 641, Class 1

Please Note - Electro Galvanized nails are not for use in cedar, cement board, redwood, most treated wood or exposed applications.

## OUTDOOR CONSTRUCTION

- Outdoor Construction  
All are in accordance with ASTM A153 Class D Standards and are suitable for most treated lumber
- Hot Dipped Galvanized
  - Hot Galvanized
  - Exterior Galvanized : Are in accordance with ESR-2914 and ASTM A153


## PRIMEGUARD MAX

- Stainless Steel - AISI 304
- Stainless Steel - AISI 316 for marine applications

Grip-Rite Collated meet or exceed the ASTM F1667 Standard (if applicable).



## TECHNICAL INFORMATION

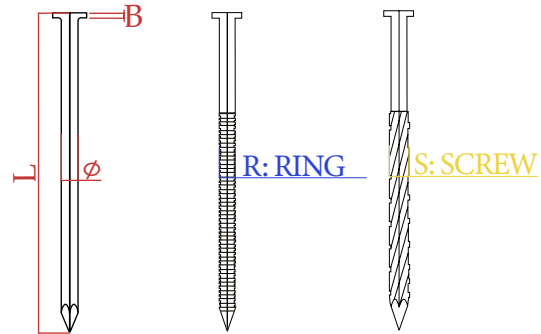

SMOOTH( $\phi$ )	NAILS/COIL (ADJUSTABLE ACCORDING TO CARTON COUNT)	NAIL LENGTH	LENGTH TOLERANCE(L)
0.083"(+0/-0.004")	300	1-1/4"	1.26"(+/-1/16")
0.086"(+0/-0.004")	300	1-1/2"	1.5"(+/-1/16")
0.090"(+0/-0.004")	300	1-3/4"	1.75"(+/-1/16")
0.092"(+0/-0.004")	300	2"	2"(+/-1/16")
0.099"(+0/-0.002")	250	2-3/16"	2.188"(+/-1/16")
0.113"(+0/-0.004")	225	2-1/4"	2.25"(+/-1/16")
0.120"(+0/-0.004")	200	2-3/8"	2.375"(+/-1/16")
0.131"(+0/-0.004")	200	2-1/2"	2.5"(+/-1/16")
		3"	3"(+/-3/32")
		3-1/4"	3.25"(+/-3/32")

NAIL WIRE DIAMETER	HEAD DIAMETER(D)	HEAD THICKNESS(B)
0.080"	0.197"-0.224"	0.020"-0.030"
0.086"	0.197"-0.224"	0.020"-0.030"
0.090"	0.211"-0.228"	0.020"-0.030"
0.092"	0.211"-0.228"	0.020"-0.030"
0.099"	0.248"-0.268"	0.025"-0.036"
0.113"	0.268"-0.285"	0.039"-0.049"
0.120"	0.268"-0.285"	0.039"-0.049"
0.131"	0.268"-0.285"	0.043"-0.059"

RING(R)	SCREW(S)	BEND YIELD,PSI
$\phi$ (+0.003"-+0.006")	$\phi$ (+0.004"-+0.008")	>100,000
$\phi$ (+0.004"-+0.008")	$\phi$ (+0.006"-+0.010")	



# COLLATED 15° WIRE WELD COIL NAILS

## PRODUCT SPECIFICATIONS

ITEM#	DESCRIPTION	GROUP	LENGTH	DIAMETER	SHANK	PIECE	COATING
GRC4P99ST	15° WIRE 1 1/2"X.099 SMOOTH STIFF 4.5M	15° WIRE COIL	1-1/2"	.099	SMOOTH	4.5M	BRIGHT COATED
GRC4P113ST	15° WIRE 1 1/2"X.113 SMOOTH STIFF 4.5M	15° WIRE COIL	1-1/2"	.113	SMOOTH	4.5M	BRIGHT COATED
GRC6P99D	15° WIRE 2"X.099 CTD SMOOTH 3M	15° WIRE COIL	2"	.099	SMOOTH	3M	BRIGHT COATED
GRC6R99D	15° WIRE 2"X.099 CTD RING 3M	15° WIRE COIL	2"	.099	RING	3M	BRIGHT COATED
GRC7P99ST	15° WIRE 2 1/4"X.099 SMOOTH STIFF 4.5M	15° WIRE COIL	2-1/4"	.099	SMOOTH	4.5M	BRIGHT COATED
GRC7P113ST	15° WIRE 2 1/4"X.113 SMOOTH STIFF 4.5M	15° WIRE COIL	2-1/4"	.113	SMOOTH	4.5M	BRIGHT COATED
GRC8P99D	15° WIRE 2 3/8"X.099 CTD SMOOTH 3M	15° WIRE COIL	2-3/8"	.099	SMOOTH	3M	BRIGHT COATED
GRC8R99D	15° WIRE 2 3/8"X.099 CTD RING 3M	15° WIRE COIL	2-3/8"	.099	RING	3M	BRIGHT COATED
GRC8PD	15° WIRE 2 3/8"X.113 CTD SMOOTH 3M	15° WIRE COIL	2-3/8"	.113	SMOOTH	3M	BRIGHT COATED
GRC8RD	15° WIRE 2 3/8"X.113 CTD RING 3M	15° WIRE COIL	2-3/8"	.113	RING	3M	BRIGHT COATED
GRC8RD45	15° WIRE 2-3/8 X.113 CTD RING 4.5M	15° WIRE COIL	2-3/8"	.113	RING	4.5M	BRIGHT COATED
GRC8PZD	15° WIRE 2 1/2"X.131 CTD SMOOTH 3M	15° WIRE COIL	2-1/2"	.131	SMOOTH	3M	BRIGHT COATED
GRC8PZD45S	15° WIRE 2-1/2"X.131 CTD SCREW 4.5M	15° WIRE COIL	2-1/2"	.131	SCREW	4.5M	BRIGHT COATED
GRC10PD	15° WIRE 3"X.120 CTD SMOOTH 2.5M	15° WIRE COIL	3"	.120	SMOOTH	2.5M	BRIGHT COATED
GRC10PZD	15° WIRE 3"X.131 CTD SMOOTH 2.5M	15° WIRE COIL	3"	.131	SMOOTH	2.5M	BRIGHT COATED
GRC12PD	15° WIRE 3 1/4"X.120 CTD SMOOTH 2.5M	15° WIRE COIL	3-1/4"	.120	SMOOTH	2.5M	BRIGHT COATED
GRC12SD	15° WIRE 3 1/4"X.120 CTD SCREW 2.5M	15° WIRE COIL	3-1/4"	.120	SCREW	2.5M	BRIGHT COATED
GRC12PZD	15° WIRE 3 1/4"X.131 CTD SMOOTH 2.5M	15° WIRE COIL	3-1/4"	.131	SMOOTH	2.5M	BRIGHT COATED

ITEM#	DESCRIPTION	GROUP	LENGTH	DIAMETER	SHANK	PIECE	COATING
GRC6P99DG	15° WIRE 2"X.099 EG SMOOTH 3M	15° WIRE COIL	2"	.099	SMOOTH	3M	ELECTROGALVANIZED
GRC6R99DG	15° WIRE 2"X.099 EG RING 3M	15° WIRE COIL	2"	.099	RING	3M	ELECTROGALVANIZED
GRC8P99DG	15° WIRE 2-3/8"X.099 EG SMOOTH 3M	15° WIRE COIL	2-3/8"	.099	SMOOTH	3M	ELECTROGALVANIZED
GRC8R99DG	15° WIRE 2-3/8"X.099 EG RING 3M	15° WIRE COIL	2-3/8"	.099	RING	3M	ELECTROGALVANIZED
GRC8RDG	15° WIRE 2-3/8"X.113 EG RING 3M	15° WIRE COIL	2-3/8"	.113	RING	3M	ELECTROGALVANIZED
GRC8PZDG	15° WIRE 2-1/2"X.131 EG SMOOTH 3M	15° WIRE COIL	2-1/2"	.131	SMOOTH	3M	ELECTROGALVANIZED
GRC8RZDG	15° WIRE 2-1/2"X.131 EG RING 3M	15° WIRE COIL	2-1/2"	.131	RING	3M	ELECTROGALVANIZED
GRC10PDG	15° WIRE 3"X.120 EG SMOOTH 2.5M	15° WIRE COIL	3"	.120	SMOOTH	2.5M	ELECTROGALVANIZED
GRC10RDG	15° WIRE 3"X.120 EG RING 2.5M	15° WIRE COIL	3"	.120	RING	2.5M	ELECTROGALVANIZED
GRC12PDG	15° WIRE 3 1/4"X.120 EG SMOOTH 2.5M	15° WIRE COIL	3-1/4"	.120	SMOOTH	2.5M	ELECTROGALVANIZED
GRC12RDG	15° WIRE 3-1/4"X.120 EG RING 2.5M	15° WIRE COIL	3-1/4"	.120	RING	2.5M	ELECTROGALVANIZED
GRC12PZDG	15° WIRE 3-1/4"X.131 EG SMOOTH 2.5M	15° WIRE COIL	3-1/4"	.131	SMOOTH	2.5M	ELECTROGALVANIZED

ITEM#	DESCRIPTION	GROUP	LENGTH	DIAMETER	SHANK	PIECE	COATING
GRC6R99DHG	15° WIRE 2"X.099 HG RING 3M	15° WIRE COIL	2"	.099	RING	3M	HOT GALV.-EXTERIOR GALV.
GRC8P99DHG	15° WIRE 2 3/8"X.099 HG SMOOTH 3M	15° WIRE COIL	2-3/8"	.099	SMOOTH	3M	HOT GALV.-EXTERIOR GALV.
GRC8R99DHG	15° WIRE 2 3/8"X.099 HG RING 3M	15° WIRE COIL	2-3/8"	.099	RING	3M	HOT GALV.-EXTERIOR GALV.
GRC8PDHG	15° WIRE 2-3/8"X.113 HG SMOOTH 3M	15° WIRE COIL	2-3/8"	.113	SMOOTH	3M	HOT GALV.-EXTERIOR GALV.
GRC8RDHG	15° WIRE 2-3/8" X.113 HG RING 3M	15° WIRE COIL	2-3/8"	.113	RING	3M	HOT GALV.-EXTERIOR GALV.
GRC8PZDHG	15° WIRE 2-1/2"X.131 HG SMOOTH 4.5M	15° WIRE COIL	2-1/2"	.131	SMOOTH	4.5M	HOT GALV.-EXTERIOR GALV.
GRC8PZDHGR	15° WIRE 2-1/2"X.131 HG RING 4.5M	15° WIRE COIL	2-1/2"	.131	RING	4.5M	HOT GALV.-EXTERIOR GALV.
GRC10PDHG	15° WIRE 3"X.120 HG SMOOTH 2.5M	15° WIRE COIL	3"	.120	SMOOTH	2.5M	HOT GALV.-EXTERIOR GALV.
GRC10RDHG	15° WIRE 3"X.120 HG RING 2.5M	15° WIRE COIL	3"	.120	RING	2.5M	HOT GALV.-EXTERIOR GALV.
GRC12PDHG	15° WIRE 3 1/4"X.120 HG SMOOTH 2.5M	15° WIRE COIL	3-1/4"	.120	SMOOTH	2.5M	HOT GALV.-EXTERIOR GALV.
GRC12RDHG	15° WIRE 3 1/4"X.120 HG RING 2.5M	15° WIRE COIL	3-1/4"	.120	RING	2.5M	HOT GALV.-EXTERIOR GALV.



# COLLATED 15° WIRE WELD COIL NAILS

## PRODUCT SPECIFICATIONS

ITEM#	DESCRIPTION	GROUP	LENGTH	DIAMETER	SHANK	PIECE	ALLOY
MAXC62822	2 X 113 15D W RS 304 3.6M	15° WIRE COIL	2"	.113	RING	3.6M	304 STAINLESS STEEL
MAXC62825	2-1/2 X 113 15D W RS 304 3.6M	15° WIRE COIL	2-1/2"	.113	RING	3.6M	304 STAINLESS STEEL
MAXC62828	3 X 120 15D W RS 304 1.8M	15° WIRE COIL	3"	.120	RING	1.8M	304 STAINLESS STEEL
MAXC64432	3-1/4 X 120 15D W RS 304 2.5M	15° WIRE COIL	3-1/4"	.120	RING	2.5M	304 STAINLESS STEEL

ITEM#	DESCRIPTION	GROUP	LENGTH	DIAMETER	SHANK	PIECE	COATING
GRC3R80DG	15° WIRE 1-1/4"X.080 EG RING 3M	15° WIRE COIL SIDING	1-1/4"	.080	RING	3M	ELECTROGALVANIZED
GRC4R80DG	15° WIRE 1-1/2"X.080 EG RING 3M	15° WIRE COIL SIDING	1-1/2"	.080	RING	3M	ELECTROGALVANIZED
GRC5R80DG	15° WIRE 1-3/4"X.080 EG RING 3M	15° WIRE COIL SIDING	1-3/4"	.080	RING	3M	ELECTROGALVANIZED
GRC5R90DG	15° WIRE 1 3/4"X.090 EG RING 3M	15° WIRE COIL SIDING	1-3/4"	.090	RING	3M	ELECTROGALVANIZED
GRC6R90DG	15° WIRE 2"X.092 GALV RING 3M	15° WIRE COIL SIDING	2"	.092	RING	3M	ELECTROGALVANIZED
GRC7P90DG	15° WIRE 2-3/16"X.092 EG SMOOTH 3M	15° WIRE COIL SIDING	2-3/16"	.092	SMOOTH	3M	ELECTROGALVANIZED
GRC7R92G1	15° RH WIRE 2-3/16 X.092 EG RING 1.2M	15° WIRE COIL SIDING	2-3/16"	.092	RING	1.2M	ELECTROGALVANIZED
GRC7R90DG	15° WIRE 2 3/16"X.092 EG RING 3M	15° WIRE COIL SIDING	2-3/16"	.092	RING	3M	ELECTROGALVANIZED
GRC7R90G	15° WIRE 2-1/4 X.090 EG RING 3.6M	15° WIRE COIL SIDING	2-1/4"	.090	RING	3.6M	ELECTROGALVANIZED
GRC7R92G	15° WIRE 2-1/4"X.092 EG RING 3.6M	15° WIRE COIL SIDING	2-1/4"	.092	RING	3.6M	ELECTROGALVANIZED
GRC7R92DG	15° WIRE 2 3/16"X.092 EG RING 3.6M	15° WIRE COIL SIDING	2-3/16"	.092	RING	3.6M	ELECTROGALVANIZED
GRC8R90DG	15° WIRE 2-1/2"X0.092 EG RING 3M	15° WIRE COIL SIDING	2-1/2"	.092	RING	3M	ELECTROGALVANIZED

ITEM#	DESCRIPTION	GROUP	LENGTH	DIAMETER	SHANK	PIECE	COATING
GRC3R80DHG	15° WIRE 1-1/4" X .080 HG RING 3M	15° WIRE COIL SIDING	1-1/4"	.080	RING	3M	HOT GALV.-EXTERIOR GALV.
GRC3R90HG36	15° WIRE 1-1/4" X .090 HG RING 3.6M	15° WIRE COIL SIDING	1-1/4"	.090	RING	3.6M	HOT GALV.-EXTERIOR GALV.
GRC4R80DHG	15° WIRE 1 1/2"X.080 HG RING 3M	15° WIRE COIL SIDING	1-1/2"	.080	RING	3M	HOT GALV.-EXTERIOR GALV.
GRC4R90HG3	15° WIRE 1-1/2" X .090 HG RING 3M	15° WIRE COIL SIDING	1-1/2"	.090	RING	3M	HOT GALV.-EXTERIOR GALV.
GRC5R80DHG	15° WIRE 1 3/4"X.080 HG RING 3M	15° WIRE COIL SIDING	1-3/4"	.080	RING	3M	HOT GALV.-EXTERIOR GALV.
GRC5R90DHG	15° WIRE 1-3/4"X.092 HG RING 3M	15° WIRE COIL SIDING	1-3/4"	.092	RING	3M	HOT GALV.-EXTERIOR GALV.
GRC5R92HG1	15° RH WIRE 1-3/4"X.092 HG RING 1.2M	15° WIRE COIL SIDING	1-3/4"	.092	RING	1M	HOT GALV.-EXTERIOR GALV.
GRC5R92HG36	15° WIRE 1-3/4"X.092 HG RING 3.6M	15° WIRE COIL SIDING	1-3/4"	.092	RING	3.6M	HOT GALV.-EXTERIOR GALV.
GRC6R92HG1	15° RH WIRE 2 X.092 HG RING 1.2M	15° WIRE COIL SIDING	2"	.092	RING	1.2M	HOT GALV.-EXTERIOR GALV.
GRC6R90DHG	15° WIRE 2"X.092 HG RING 3M	15° WIRE COIL SIDING	2"	.092	RING	3M	HOT GALV.-EXTERIOR GALV.
GRC7P92HG1	15° RH WIRE 2-3/16 X.092 HG SMOOTH 1.2M	15° WIRE COIL SIDING	2-3/16"	.092	SMOOTH	1.2M	HOT GALV.-EXTERIOR GALV.
GRC7R92HG1	15° RH WIRE 2-3/16 X.092 HG RING 1.2M	15° WIRE COIL SIDING	2-3/16"	.092	RING	1.2M	HOT GALV.-EXTERIOR GALV.
GRC7P90DHG	15° WIRE 2 3/16"X.092 HG SMOOTH 3M	15° WIRE COIL SIDING	2-3/16"	.092	SMOOTH	3M	HOT GALV.-EXTERIOR GALV.
GRC7R90DHG	15° WIRE 2 3/16"X.092 HG RING 3M	15° WIRE COIL SIDING	2-3/16"	.092	RING	3M	HOT GALV.-EXTERIOR GALV.
GRC8P90DHG	15° WIRE 2 1/2"X.092 HG SMOOTH 3M	15° WIRE COIL SIDING	2-1/2"	.092	SMOOTH	3M	HOT GALV.-EXTERIOR GALV.
GRC8R90DHG	15° WIRE 2 1/2"X0.092 HG RING 3M	15° WIRE COIL SIDING	2-1/2"	.092	RING	3M	HOT GALV.-EXTERIOR GALV.



# COLLATED 15° WIRE WELD COIL NAILS

## PRODUCT SPECIFICATIONS

ITEM#	DESCRIPTION	GROUP	LENGTH	DIAMETER	SHANK	PIECE	ALLOY
MAXC62874	1-1/4 X 090 15D W RS WOOD SID 304 1.2M	15° WIRE COIL SIDING	1-1/4"	.090	RING	1.2M	304 STAINLESS STEEL
MAXC62817	1-1/4 X 090 15D W RS WOOD SID 304 3.6M	15° WIRE COIL SIDING	1-1/4"	.090	RING	3.6M	304 STAINLESS STEEL
MAXC62872	1-1/2 X 090 15D W RS WOOD SID 304 1.2M	15° WIRE COIL SIDING	1-1/2"	.090	RING	1.2M	304 STAINLESS STEEL
MAXC62816	1-1/2 X 090 15D W RS WOOD SID 304 3.6M	15° WIRE COIL SIDING	1-1/2"	.090	RING	3.6M	304 STAINLESS STEEL
MAXC62875	1-3/4 X 090 15D W RS WOOD SID 304 1.2M	15° WIRE COIL SIDING	1-3/4"	.090	RING	1.2M	304 STAINLESS STEEL
MAXC64424	1-3/4 X 086 15D W RS WOOD SID 304 1.8M	15° WIRE COIL SIDING	1-3/4"	.086	RING	1.8M	304 STAINLESS STEEL
MAXC62818	1-3/4 X 090 15D W RS WOOD SID 304 3.6M	15° WIRE COIL SIDING	1-3/4"	.090	RING	3.6M	304 STAINLESS STEEL
MAXC62876	2 X 090 15D W RS FBRCMT SID 304 1.2M	15° WIRE COIL SIDING	2"	.090	RING	1.2M	304 STAINLESS STEEL
MAXC62820	2X090 15D W RS FBRCMT/WOOD SDG 304 3.6M	15° WIRE COIL SIDING	2"	.090	RING	3.6M	304 STAINLESS STEEL
MAXC70128	2-3/16"X090 15D W RS FBRCT/WD SD304 .6M	15° WIRE COIL SIDING	2-3/16"	.090	RING	600	304 STAINLESS STEEL
MAXC62885	2-3/16X090 15D W RS FBRCMT SID 304 1.2M	15° WIRE COIL SIDING	2-3/16"	.090	RING	1.2M	304 STAINLESS STEEL
MAXC62827	2-3/16X090 15D W RS FBRCT/WD SD 304 3.6M	15° WIRE COIL SIDING	2-3/16"	.090	RING	3.6M	304 STAINLESS STEEL
MAXC64428	2-3/16 X 090 15D W RS WOOD SID 304 3.6M	15° WIRE COIL SIDING	2-3/16"	.090	RING	3.6M	304 STAINLESS STEEL
MAXC62881	2-1/2 X 090 15D W RS WOOD SID 304 900EA	15° WIRE COIL SIDING	2-1/2"	.090	RING	900	304 STAINLESS STEEL
MAXC62823	2-1/2 X 090 15D W RS WOOD SID 304 3.6M	15° WIRE COIL SIDING	2-1/2"	.090	RING	3.6M	304 STAINLESS STEEL
MAXC62815	1-1/2 X 090 15D W RS WOOD SID 316 1.8M	15° WIRE COIL SIDING	1-1/2"	.090	RING	1.8M	316 STAINLESS STEEL
MAXC62819	1-3/4 X 090 15D W RS WOOD SID 316 1.8M	15° WIRE COIL SIDING	1-3/4"	.090	RING	1.8M	316 STAINLESS STEEL
MAXC62821	2X090 15D W RS FBRCMT/WOOD SDG 316 1.8M	15° WIRE COIL SIDING	2"	.090	RING	1.8M	316 STAINLESS STEEL
MAXC62826	2-3/16X090 15D W RS FBRCT/WD SD 316 1.8M	15° WIRE COIL SIDING	2-3/16"	.090	RING	1.8M	316 STAINLESS STEEL
MAXC62824	2-1/2 X 090 15D W RS WOOD SID 316 1.8M	15° WIRE COIL SIDING	2-1/2"	.090	RING	1.8M	316 STAINLESS STEEL



Contact your PrimeSource® representative to order today  
800-676-7777 | [primesourcebp.com](http://primesourcebp.com)

**WE BUILD AMERICA®**